

15F3357

Windshield Stand





Building Quality Ground Support Products Since 1961

- 750 lb platform capacity
- Hydraulically elevates 10' to 19'. Hand actuated hydraulic pump with two 2" dia. x 35" stroke lift cylinders, plus an air over hydraulic system
- 72" x 106" main platform, featuring non-slip steel tread grip floor and sliding foldable handrails
- 9 3/4 hex driven acme thread extendable planks with 20" of travel and swivel bumpers
- Two safety lanyard D-rings move for/aft with toe plates.
- Non-slip steel grip-strut steps
- Hydraulic restrictors in case of pressure failure
- Safety strut with pin
- Fixed front and swivel rear casters provide ease in maneuverability.
- 16" diameter solid tires




Clyde Machines

P.O. Box 194 1150 Hwy 55 N. Glenwood, MN 56334 USA (320) 634-4504 (320) 634-4506 Fax

www.clydemachines.com

Windshield Stand

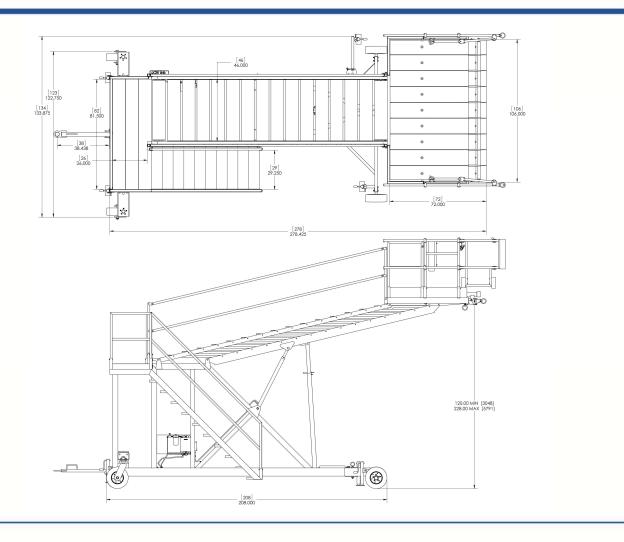

Shipping Information

- Dimensions:
 - Frame only Length 252", with basket 319"
 - Width 101.5"
 - Height 112"
 - Platform Height 10' 19'
 - Weight 5,200 lbs



Clyde Machines

P.Ö. Box 194 1150 Hwy 55 N. Glenwood, MN 56334 USA (320) 634-4504 (320) 634-4506 Fax

www.clydemachines.com